

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF JBL INCORPORATED. THEY ARE ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR MANUFACTURE OR APPARATUS WITHOUT WRITTEN PERMISSION.

ALL MATERIAL SPECIFIED ON THIS DRAWING SHALL COMPLY WITH EUROPEAN DIRECTIVE 2002/95/EC. [0013]




REVISIONS					
CHG.	LTR.	DESCRIPTION	DRFT	D.C.	DATE
	A	RELEASE TO MARKETING	TH		

4

3

2

1

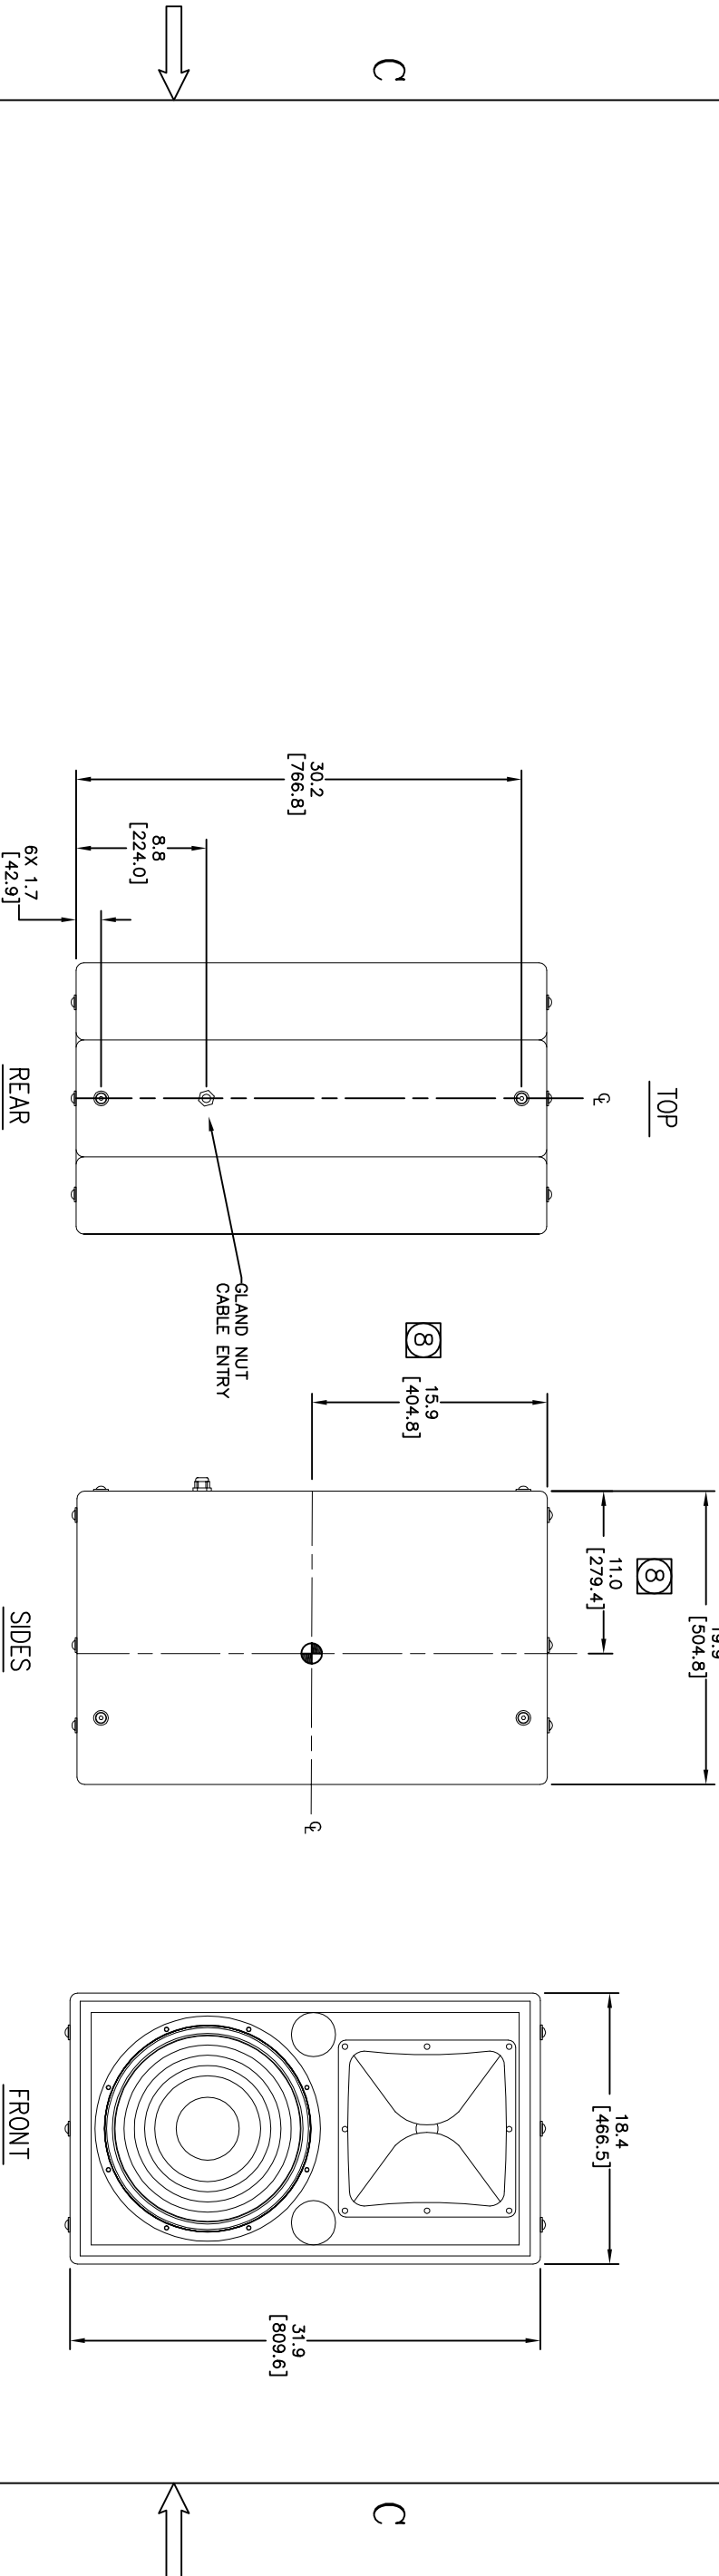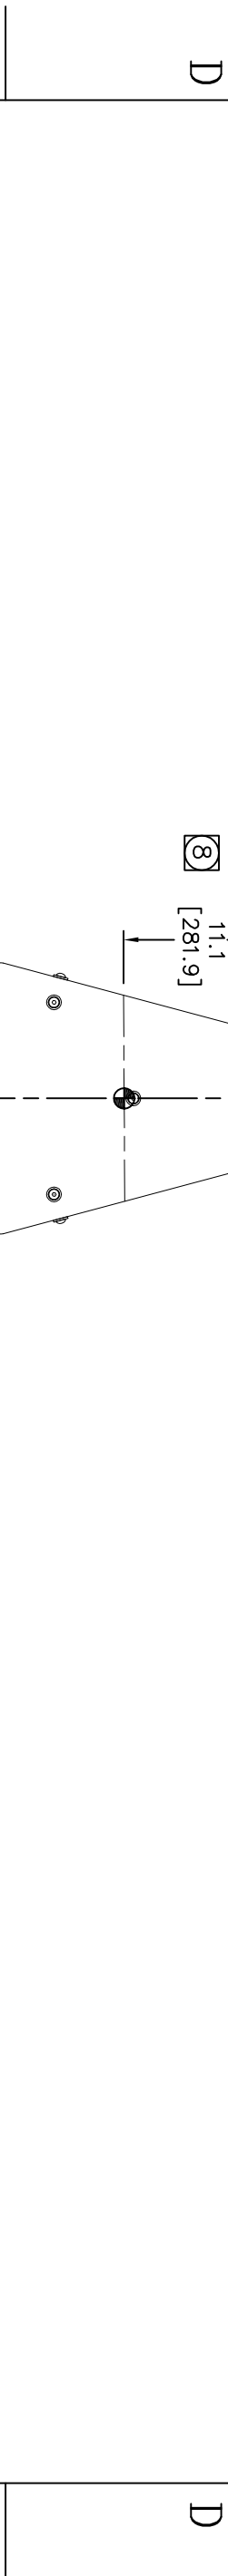


B 8 INDICATED DIMENSIONS ARE TO CENTER OF GRAVITY (CG).

7. WEIGHT: 33.1 KG [73 LBS].
6. SUSPENSION POINTS: M10 THREADED SUSPENSION POINTS. 4X TOP, 4X BOTTOM, 2X LEFT, 2X RIGHT, 2X REAR
5. COMPONENTS: LF – 2265H  
HF – 2432H
4. INPUT CONNECTORS: 20' DIRECT BURIAL CAPTIVE CABLE.
3. GRILL: 16 GA. VINYL DIPPED STAINLESS STEEL GRAY WITH BLACK FOAM BACKING AND VAPOR BARRIER.
2. MATERIALS: 5/8 INCH BIRCH PLYWOOD.
1. FINISH: GRAY FIBERGLASS (STD)  
(WHITE & BLACK AVAILABLE BY CUSTOM ORDER)

A

- NOTES: (UNLESS OTHERWISE SPECIFIED)
4. INPUT CONNECTORS: 20' DIRECT BURIAL CAPTIVE CABLE.
  3. GRILL: 16 GA. VINYL DIPPED STAINLESS STEEL GRAY WITH BLACK FOAM BACKING AND VAPOR BARRIER.
  2. MATERIALS: 5/8 INCH BIRCH PLYWOOD.
  1. FINISH: GRAY FIBERGLASS (STD)  
(WHITE & BLACK AVAILABLE BY CUSTOM ORDER)

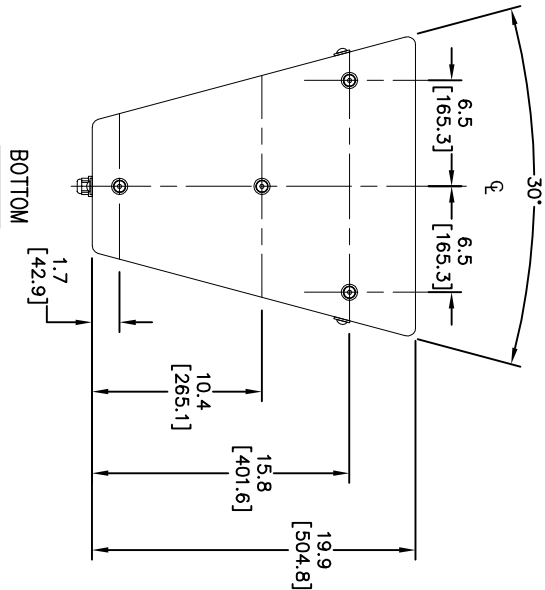

4

3

2

1

TOLERANCES (UNLESS OTHERWISE SPECIFIED)		JBL PROFESSIONAL A Harman International Company Northridge, California 91329 U.S.A.	
<div><div>JBL</div></div>			
TITLE AM7215/XX-WRX CUSTOMER DRAWING			
SIZE A	DRAWING NO. 1000330144	REV A	
SCALE NTS		SHEET 1	OF 1

A

B

C

D