
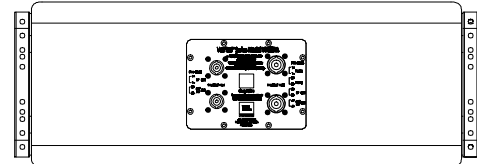
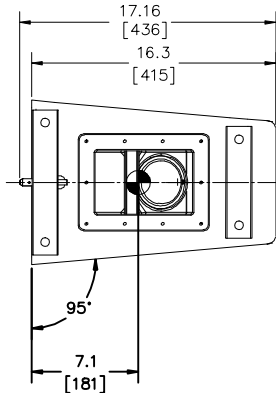
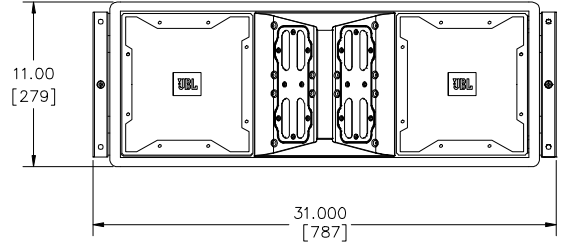


8 7 6 5 4 3 2 1

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF JBL INCORPORATED THEY ARE ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS THE BASIS FOR MANUFACTURING OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

ALL MATERIAL SPECIFIED ON THIS DRAWING SHALL COMPLY WITH EUROPEAN DIRECTIVE 2002/95/EC. **RoHS**

REVISIONS						
CHG	LTR	DESCRIPTION	DRFT	CHK	DATE	APPR
36232	A	RELEASE FOR MARKETING	YT			

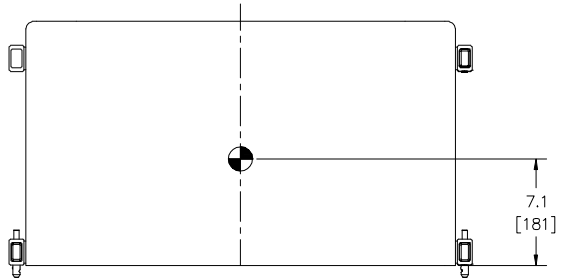

- COMPONENTS: LF - 2X 2168J-1; MF - 4X 2104H; HF - 2X 2408H
- INPUT CONNECTORS: 2X SPEAKON NL-4 AND 2X SPEAKON NL-8 (ELECTRICALLY IN PARALLEL)
- GRILLE 16GA PERFORATED CRS, POWDERCOATED BLACK, BLACK FOAM BACKING.
- MATERIALS: 15MM LITE-PLY, 15MM BIRCH PLYWOOD AND 18MM BIRCH PLYWOOD.
- FINISH: BLACK DURAFLEX.
- SUSPENSION SYSTEM: JBL PROPRIETARY, HINGE-BARS, BALL LOCK PINS AND RIGGING FRAMES
- WEIGHT: 30 Kg (66 LBS)
- CENTER OF GRAVITY (CG)

NOTES: (UNLESS OTHERWISE SPECIFIED)

TOLERANCES
(UNLESS OTHERWISE SPECIFIED)
 XXX ± 0.031 INCH
 XX ± 0.063 INCH
 X ± 0.125 INCH
 ANGULAR ± 30°
 • ALL DIMENSIONS ARE FINISHED DIMENSIONS
 • DO NOT SCALE DRAWING

JBL	JBL Professional A Harman International Company Northridge, California 91329, U.S.A.
TITLE CUSTOMER DWG - VT4887A	
REV D	DRAWING NO. 365258
REV A	
SCALE: 1:4	
SHEET 1 of 1	