




## InvisiBall™ Threading

### Control Contractor Surface-Mount Loudspeakers

Following are the threading specifications for the InvisiBall™ mounting system of JBL Control Contractor loudspeakers.

**Threading**

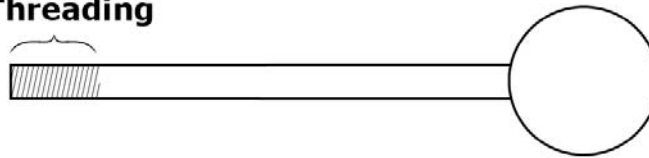

Loudspeaker Model	Regular InvisiBall™ (included with the loudspeaker)		MTC-xxCM Optional Ceiling-Mount Adapter	
	Threading Diameter & Pitch	Length of Threading	Threading Diameter & Pitch	Length of Threading
Control 23 Control 23T	6 mm diameter, 1.0 mm thread pitch	22mm (0.8 inch)	1/4 inch diameter, 20 threads per inch	22mm (0.8 inch)
Control 25 Control 25T Control 25AV Control 25AV-LS Control 28 Control 28T-60	7/16 inch diameter, 20 threads per inch	26mm (1.0 inch)	7/16 inch diameter, 20 threads per inch	34mm (1.3 inch)
Control 29AV (C29AV-1)	7/16 inch diameter, 20 threads per inch	30mm (1.2 inch)	12 mm diameter 1.75 thread pitch	48mm (1.9 inch)
Control 30	16 mm diameter, 2.0 thread pitch	60 mm (2.3 inch)	16 mm diameter, 2.0 thread pitch	60 mm (2.3 inch)