


### TECHNICAL SPECIFICATIONS

<b>SYSTEM</b>	
Frequency Range (-10 dB) <sup>1</sup> :	41 - 20kHz
Frequency Range (-6 dB) <sup>1</sup> :	45 - 19.5kHz
Frequency Range(-3 dB) <sup>1</sup> :	50 - 19.2kHz
<b>Coverage Pattern</b>	
Horizontal:	90° Nominal (400 - 16kHz)
Vertical:	Varies with Array size and configuration
<b>System Sensitivity (2.83V @ 1m)</b>	
LF (2.83V @ 1m / 1W @ 1m) <sup>2</sup> :	98dB/96dB
MF (2.83V @ 1m / 1W @ 1m) <sup>2</sup> :	102dB/102dB
HF (2.83V @ 1m / 1W @ 1m) <sup>2</sup> :	110db/107dB
<b>System Impedance</b>	
LF:	4 ohms
MF:	8 ohms
HF:	4 ohms
<b>System Power Rating</b>	
LF (100hrs/2hrs) <sup>3</sup> :	1000W/1300W
MF <sup>4</sup> :	550W/750W
HF <sup>4</sup> :	300W/350W
<b>Maximum Peak Output:</b>	
System <sup>5</sup> :	149.6 dB SPL
LF <sup>5</sup> :	136.1 dB SPL
MF <sup>5</sup> :	146.0 dB SPL
HF <sup>5</sup> :	142.5 dB SPL
<b>System Processing</b>	
Crossover:	External Tri-Amp
Crossover Frequencies <sup>6</sup> :	250 Hz, 1.7kHz
Recommended Processing:	Custom DSP Processing (IIR and FIR) for Crown ITHD, IT4x3500HD and DCiN, and DCi-DA

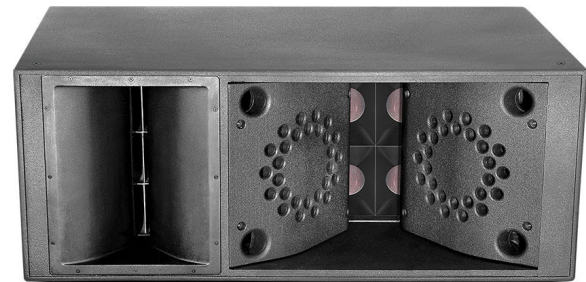

<b>TRANSDUCERS</b>	
<b>Low Frequency:</b>	2 x JBL 2265H, 15 inch diameter, dual 3 inch diameter voice coil, Neodymium Differential Drive
<b>Mid Frequency:</b>	4 x JBL 2169H 8 inch diameter, dual 3 inch diameter voice coil, Neodymium Differential Drive
<b>High Frequency:</b>	6 x JBL 2432H 1.5 inch exit compression driver, 3 inch voice coil

<b>Transducer Power Rating</b>	
LF <sup>7</sup> :	1400W/1700W
MF <sup>8</sup> :	500W
HF <sup>8</sup> :	250W


<b>PHYSICAL</b>	
<b>Enclosure:</b>	Rectangular 18mm and 16mm (5/8 in) exterior grade Baltic birch plywood
<b>Finish</b>	Standard finish and optional weather resistant versions (-WRC and -WRX) available
<b>Standard:</b>	Black Duraflex finish. White (-WH) available upon request.
<b>WRC:</b>	Covered/Protected outdoor environments, thick gray Duraflex, stainless steel hardware. White and Black available (-WH, -BK)
<b>WRX:</b>	Direct exposure or extreme environments, gray fiberglass, stainless steel hardware. White and Black available (-WH, -BK)
<b>Grill</b>	
<b>Standard:</b>	Powder coated 14 gauge perforated steel with cloth backing
<b>WRC/WRX:</b>	Three layer powder coated 16 gauge perforated stainless steel with cloth backing and stainless steel mesh.
<b>Environmental IP Rating</b>	
<b>WRC:</b>	IP55
<b>WRX:</b>	IP56
<b>Suspension</b>	
<b>WRC/WRX:</b>	16 points (4 top and bottom, 4 each side), threaded M10. Additional sealing neoprene stainless steel washers
<b>Input Connectors:</b>	Barrier strip for #6 spade lug, including gland nut and cover plate.
<b>Dimensions (H x W x D):</b>	529 x 1347 x 635 mm (20.8 x 53.0 x 25.0 in)
<b>Weight:</b>	107.3 kg (236 lbs)

**Footnotes:**

1. With recommended flat preset
2. RMS, unweighted SPL, measured under full-space conditions, normalized to 1m using broadband pink noise with a 12dB crest factor, without DSP processing.
3. IEC shaped pink noise, 6dB crest factor, based on nominal impedance, 100 hrs / 2 hrs
4. IEC shaped pink noise, 6dB crest factor, based on nominal impedance, 100 hrs
5. Peak, unweighted SPL, measured under full-space conditions, normalized to 1 meter using broadband pink noise with a 12dB crest factor and flat preset
6. With recommended processing
7. AES: Decade of pink noise, 6dB crest factor, based on minimum impedance, 100 hrs / 2 hrs
8. AES: Decade of pink noise, 6dB crest factor, based on minimum impedance, 100 hrs
9. For ordering refer to WRC & WRX Configuration document.

JBL continually engages in research related to product improvement. Some materials, production methods and design refinements are introduced into existing products without notice as a routine expression of that philosophy. For this reason, any current JBL product may differ in some respect from its published description, but will always equal or exceed the original design specifications unless otherwise stated.

DIMENSIONS

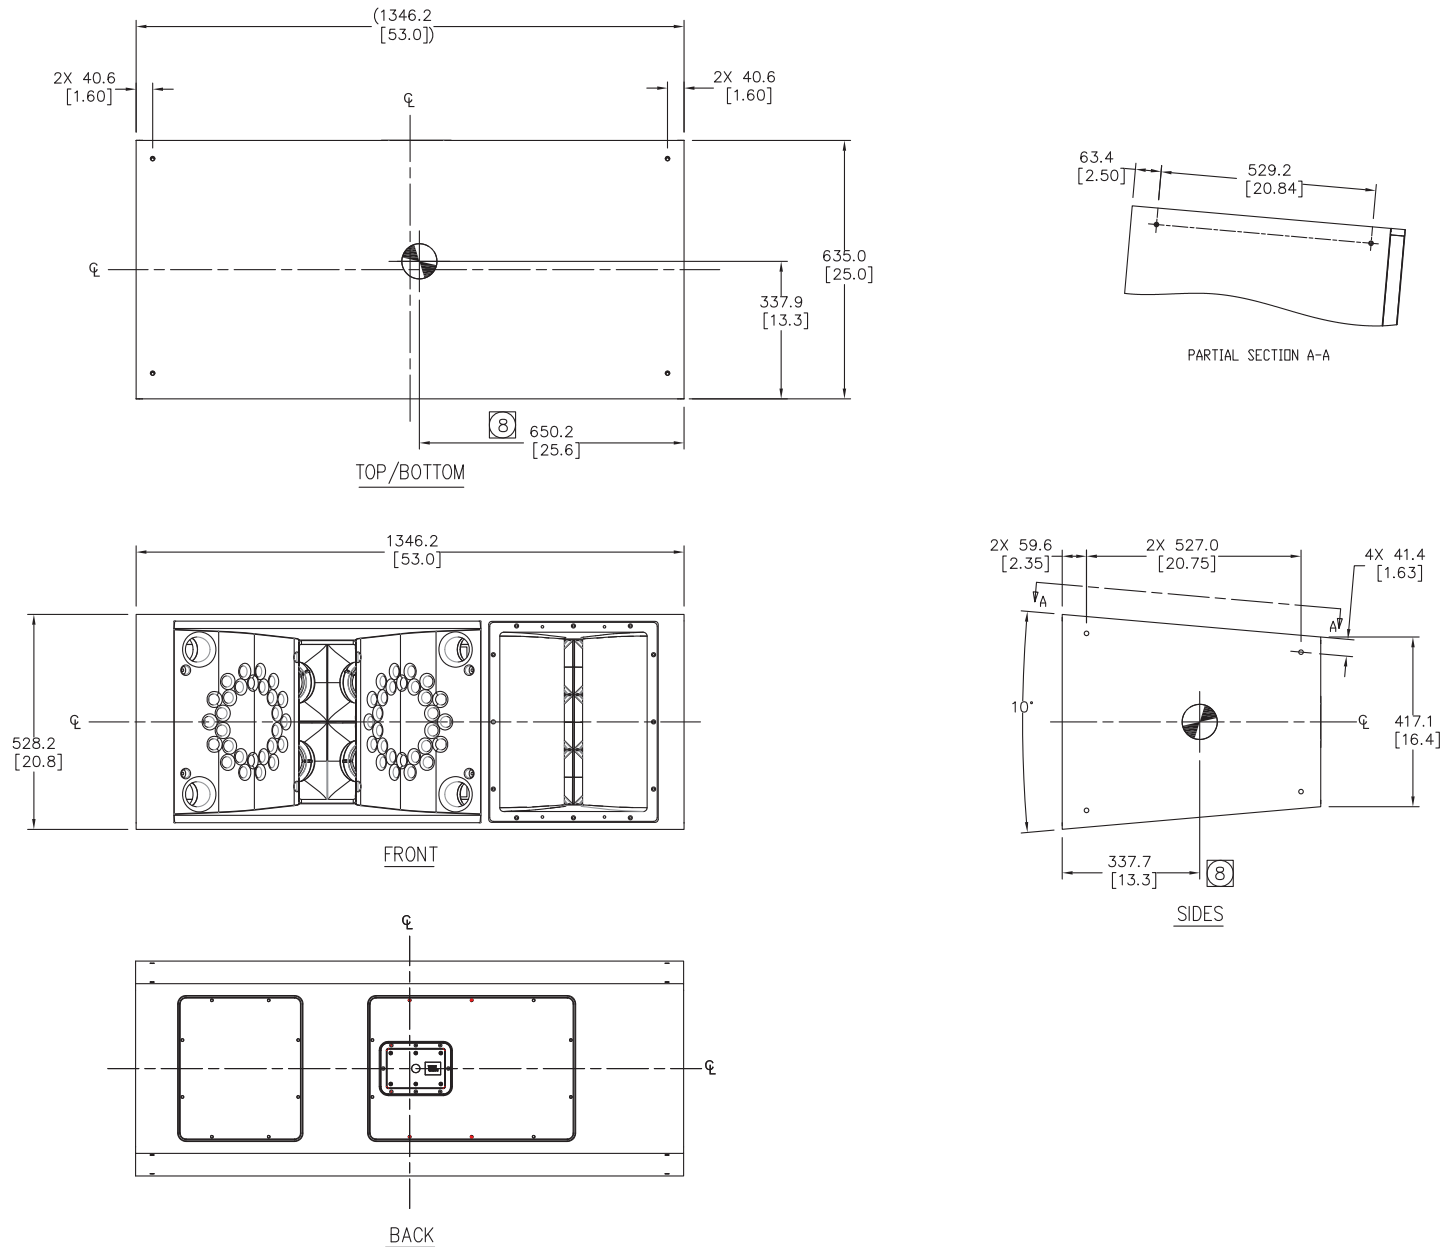

- COMPONENTS: LF- 2X 2265HPL : MF- 4X 2169H : HF- 6X 2432H
- INPUT CONNECTORS: BARRIER STRIP TERMINAL (FOR #6 SPADE LUGS)
- GRILLE 16GA, STANDARD VERSION: COLD ROLLED STEEL WITH CLOTH BACKING  
WEATHER RESISTANT VERSIONS (WRX, WRC): STAINLESS STEEL WITH CLOTH AND STAINLESS STEEL MESH BACKING
- MATERIALS: EXTERIOR GRADE BIRCH PLYWOOD
- FINISH: STANDARD VERSION: BLACK DURAFLEX, WHITE AND GRAY AVAILABLE  
WEATHER RESISTANT VERSION (WRC): GRAY DURAFLEX, BLACK AND WHITE AVAILABLE; INTERIOR WOOD SEALER  
EXTREME WEATHER RESISTANT VERSION (WRX): GRAY FIBERGLASS COATING, BLACK AND WHITE AVAILABLE; INTERIOR GELCOAT SEALER
- SUSPENSION POINTS: 16 TOTAL, 4 EA TOP & 4 EA BOTTOM, 4 EA LEFT SIDE, 4 EA RIGHT SIDE; M10 THREADED PATTERN
- WEIGHT: 107.3 Kg (236 LBS)
- CENTER OF GRAVITY (CG) LOCATION AS INDICATED ON DRAWING
- ALL DIMENSIONS ARE FOR STANDARD VERSION ENCLOSURE, FOR WEATHER RESISTANT VERSIONS (WRC, WRX) ADD 0.060" (1.5MM) ADDITIONAL COATING THICKNESS
- STAINLESS STEEL HARDWARE ON WEATHER RESISTANT VERSIONS (WRC, WRX)

NOTES: (UNLESS OTHERWISE SPECIFIED)