THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF JBL INCORPORATED. THEY ARE ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR MANUFACTURE OR APPARATUS WITHOUT WRITTEN PERMISSION.

ALL MATERIAL SPECIFIED ON THIS DRAWING SHALL COMPLY WITH EUROPEAN DIRECTIVE 2002/95/EC. RoHS

REVISIONS					
LTR	DESCRIPTION	DRFT	D.C	DATE	APPR
A	INITIAL RELEASE	TH		10/30/17	
B	REVISED DECIMAL PLACES FOR SUSPENSION POINTS DIMENSIONS	TH		5/10/19	
C	ADD NOTES 9&10, UPDATE NOTES 3&5	MM		9/28/20	

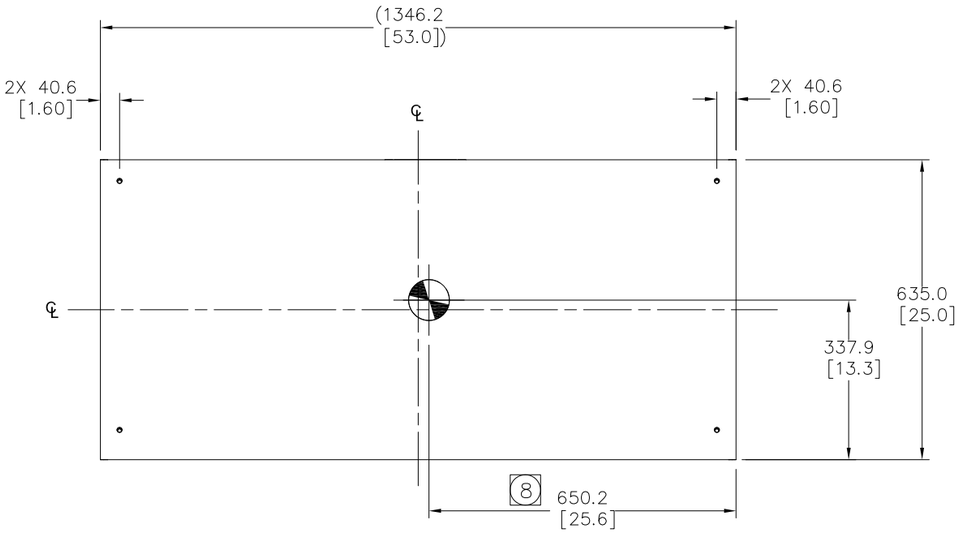

TOP/BOTTOM

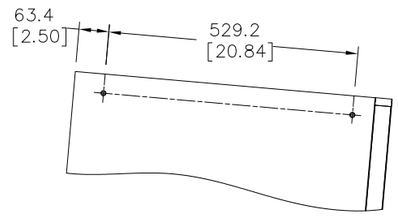

PARTIAL SECTION A-A

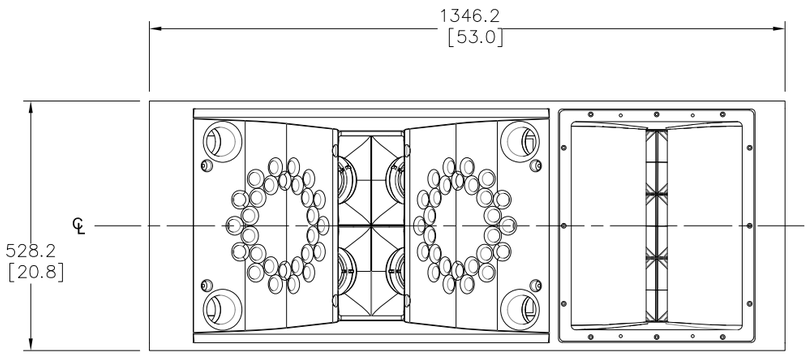

FRONT

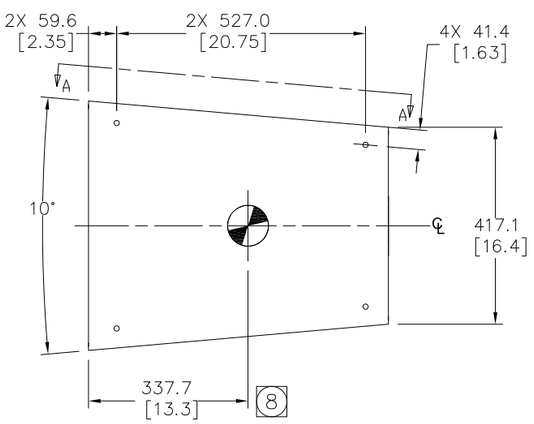

SIDES

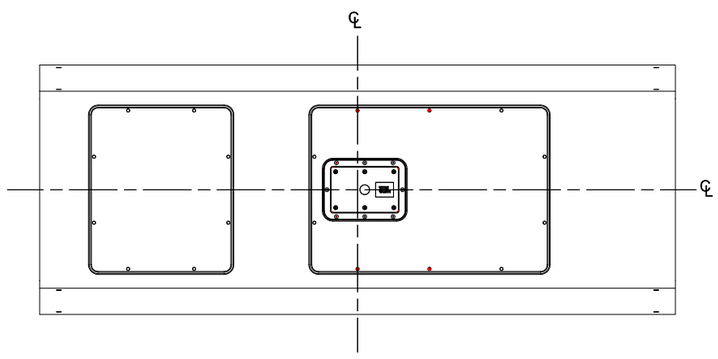

BACK

1. COMPONENTS: LF– 2X 2265HPL : MF– 4X 2169H : HF– 6X 2432H
2. INPUT CONNECTORS: BARRIER STRIP TERMINAL (FOR #6 SPADE LUGS)
3. GRILLE 16GA, STANDARD VERSION: COLD ROLLED STEEL WITH CLOTH BACKING
   WEATHER RESISTANT VERSIONS (WRX, WRC): STAINLESS STEEL WITH CLOTH AND STAINLESS STEEL MESH BACKING
4. MATERIALS: EXTERIOR GRADE BIRCH PLYWOOD
5. FINISH: STANDARD VERSION: BLACK DURAFLEX, WHITE AND GRAY AVAILABLE
   WEATHER RESISTANT VERSION (WRC): GRAY DURAFLEX, BLACK AND WHITE AVAILABLE; INTERIOR WOOD SEALER
   EXTREME WEATHER RESISTANT VERSION (WRX): GRAY FIBERGLASS COATING, BLACK AND WHITE AVAILABLE; INTERIOR GELCOAT SEALER
6. SUSPENSION POINTS: 16 TOTAL, 4 EA TOP & 4 EA BOTTOM, 4 EA LEFT SIDE, 4 EA RIGHT SIDE; M10 THREADED PATTERN
7. WEIGHT: 107.3 Kg (236 LBS)
8. CENTER OF GRAVITY (CG) LOCATION AS INDICATED ON DRAWING
9. ALL DIMENSIONS ARE FOR STANDARD VERSION ENCLOSURE, FOR WEATHER RESISTANT VERSIONS (WRC, WRX) ADD 0.060" (1.5MM) ADDITIONAL COATING THICKNESS
10. STAINLESS STEEL HARDWARE ON WEATHER RESISTANT VERSIONS (WRC, WRX)

NOTES: (UNLESS OTHERWISE SPECIFIED)

TOLERANCES
(UNLESS OTHERWISE SPECIFIED)
X.XX ± .063 INCH
X.X ± .125 INCH
ANGULAR TOLERANCE OF 0°±30'
FRACTIONAL DIMENSIONS ± 1/32
* DIMENSIONS ARE INCHES
* ALL DIMENSIONS ARE FINISHED DIMENSIONS
* DO NOT SCALE DRAWING

JBL PROFESSIONAL
A Harman International Company
Northridge, California 91329 U.S.A.

TITLE: GEN,MRKT,DWG,VLA901Hi

SIZE	DRAWING NO.	REV
A	1000318587	C

SCALE NTS SHEET 1 OF 1