




AM4200/64 Mid-High Frequency Loudspeaker with Rotatable Horn

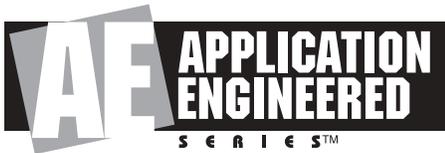

Key Features:

- ▶ 60° x 40° Coverage, rotatable for use in either vertical or horizontal orientation.
- ▶ CMCD™ Cone Midrange Compression Driver provides low midrange distortion, increased sensitivity, extended bandwidth and improved phase coherency.
- ▶ PT™ Progressive Transition Waveguide for excellent pattern control with low distortion.
- ▶ Bi-Amp/Passive Switchable.
- ▶ Optional planar array frame kits (see AE Series Array Guide).

Applications:

Use with LF and/or subwoofer reinforcement in applications such as:

- ▶ Performing arts facilities
- ▶ Theatrical sound design
- ▶ Auditoriums
- ▶ Houses of worship
- ▶ Live clubs
- ▶ Dance-clubs/discotheques
- ▶ Sports facilities
- ▶ Themed entertainment venues

Use without LF or subwoofer reinforcement in:

- ▶ Voice-only PA
- ▶ Delay fill applications

AM4200/64 is a medium power mid-high frequency loudspeaker system comprised of one 150 mm (6 in) CMCD Cone Midrange Compression Driver and one 38 mm (1.5 in) exit/38 mm (1.5 in) voice-coil HF compression driver. The multi-band PT Progressive Transition mid-high frequency waveguide provides well-controlled 60° by 40° coverage and is rotatable for cabinet positioning in either horizontal or vertical orientation. High-slope crossovers minimize band overlap and well-controlled off-axis response enhances arrayability.

The cabinet is fitted with M10 threaded suspension points. Pre-engineered array bracketry is available.

AM4200/64 is part of JBL's AE Application Engineered Series, a versatile family of loudspeakers for a wide variety of fixed installation applications.



Specifications:

System:	
Frequency Range ¹ (-10 dB):	350 Hz – 23 kHz
Frequency Response ² (±3 dB):	400 Hz – 20 kHz
Coverage Pattern:	60° x 40°, rotatable waveguide
Directivity Factor (Q):	25
Directivity Index (DI):	14 dB
Crossover Modes:	Bi-amp/Passive switchable
Passive Crossover Slopes:	MF/HF Section in Bi-amp mode: 4th order (24 dB/oct) Linkwitz-Riley HP & LP, 2.8 kHz
Transducer Power Rating (AES) ³ :	MF: 125 W (500 W peak), 2 hrs 100 W (400 W peak), 100 hrs HF: 35 W (120 W peak), 2 hrs
Long-Term System Power Rating (IEC) ⁴ :	Passive mode: 125 W (500 W peak), 100 hrs
Maximum SPL ⁵ :	Bi-amp mode: MF: 127 dB-SPL cont avg (133 dB peak) HF: 129 dB-SPL cont avg (135 dB peak) Passive mode: 127 dB-SPL cont avg (133 dB peak)
System Sensitivity ⁶ (1W @ 1m):	Passive mode: 106 dB SPL
Transducers:	
Midrange Driver:	JBL CMCD-61H Cone Midrange Compression Driver with integral 150 mm (6 in) diameter internal driver
Nominal Impedance:	8 ohms
Sensitivity (1W @ 1m):	106 dB SPL
High Frequency Driver:	JBL 2407H/MTA, 38 mm (1.5 in) exit compression driver, 38 mm (1.5 in) voice coil
Nominal Impedance:	8 ohms
Sensitivity (1W @ 1m):	114 dB SPL
Waveguide:	PT-K64MH
Physical:	
Enclosure:	Trapezoidal with 15 degree side angles, 16 mm (5/8 in) exterior grade 11-ply Finnish birch plywood
Suspension Attachment:	13 points (3 top, 3 bottom, 2 each side, 3 rear), M10 threaded hardware
Finish:	Black DuraFlex™ finish. White available upon request.
Grille:	Powder coated 14 gauge perforated steel, with acoustically transparent black foam backing.
Input Connector:	NL4 Neutrik Speakon® and CE-compliant covered barrier strip terminals. Barrier terminals accept up to 5.2 sq mm (10 AWG) wire or max width 9 mm (.375 in) spade lugs. Speakon in parallel with barrier strip for loop-through.
Environmental Specifications:	Mil-Std 810; IP-x3 per IEC529.
Dimensions (H x W x D in vertical cabinet orientation):	548 x 561 x 657 mm (21.6 x 22.1 x 25.9 in)
Net Weight:	28.1 kg (62 lb)
Optional Accessories:	M10 x 35 mm forged shoulder eyebolts with washers Optional planar array frame kit. See AE Series Bracket Guide

¹Bi-amp mode, with recommended active tuning.

²Resultant engineered acoustical response of crossover network and components.

³AES standard, one decade pink noise with 6 dB crest factor within device's operational band, free air. Standard AES 2 hr rating plus long-term 100 hr rating are specified for low-frequency transducers.





⁴IEC standard, full bandwidth pink noise with 6 dB crest factor, 100 hours.

⁵Calculated based on power rating and sensitivity, exclusive of power compression.

⁶Anechoic sensitivity in free field, no additional sensitivity gain from boundary loading.

JBL continually engages in research related to product improvement. Changes introduced into existing products without notice are an expression of that philosophy.

▶ AM4200/64 Mid-High Frequency Loudspeaker with Rotatable Horn

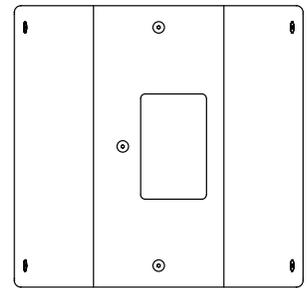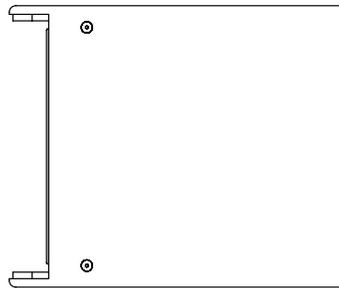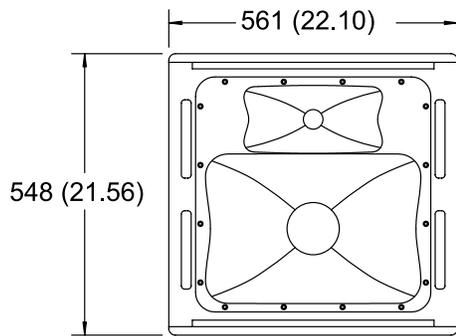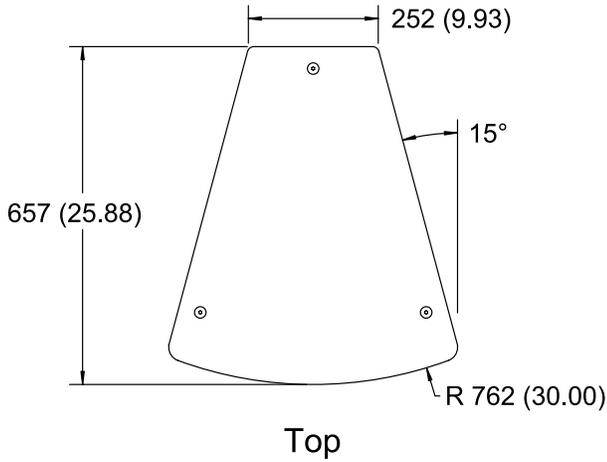

JBL Professional
8500 Balboa Boulevard, P.O. Box 2200
Northridge, California 91329 U.S.A.

H A Harman International Company
© Copyright 2002 JBL Professional

SS AM4200/64
CRP 5M
10/04