

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF JBL INCORPORATED. THEY ARE ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR MANUFACTURE OR APPARATUS WITHOUT WRITTEN PERMISSION.

ALL MATERIAL SPECIFIED ON THIS DRAWING SHALL COMPLY WITH EUROPEAN DIRECTIVE 2002/95/EC. [F0113]

REVISIONS					
CHG.	LTR.	DESCRIPTION	DEPT.	D.C.	DATE
	A	RELEASE TO MARKETING	TH		
					SO


4

3

2


1

D

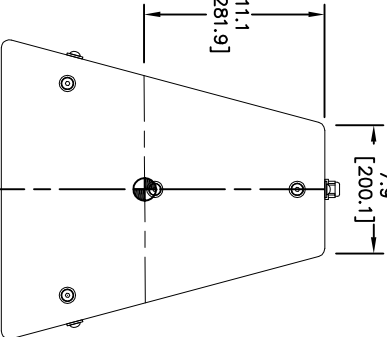


D

C

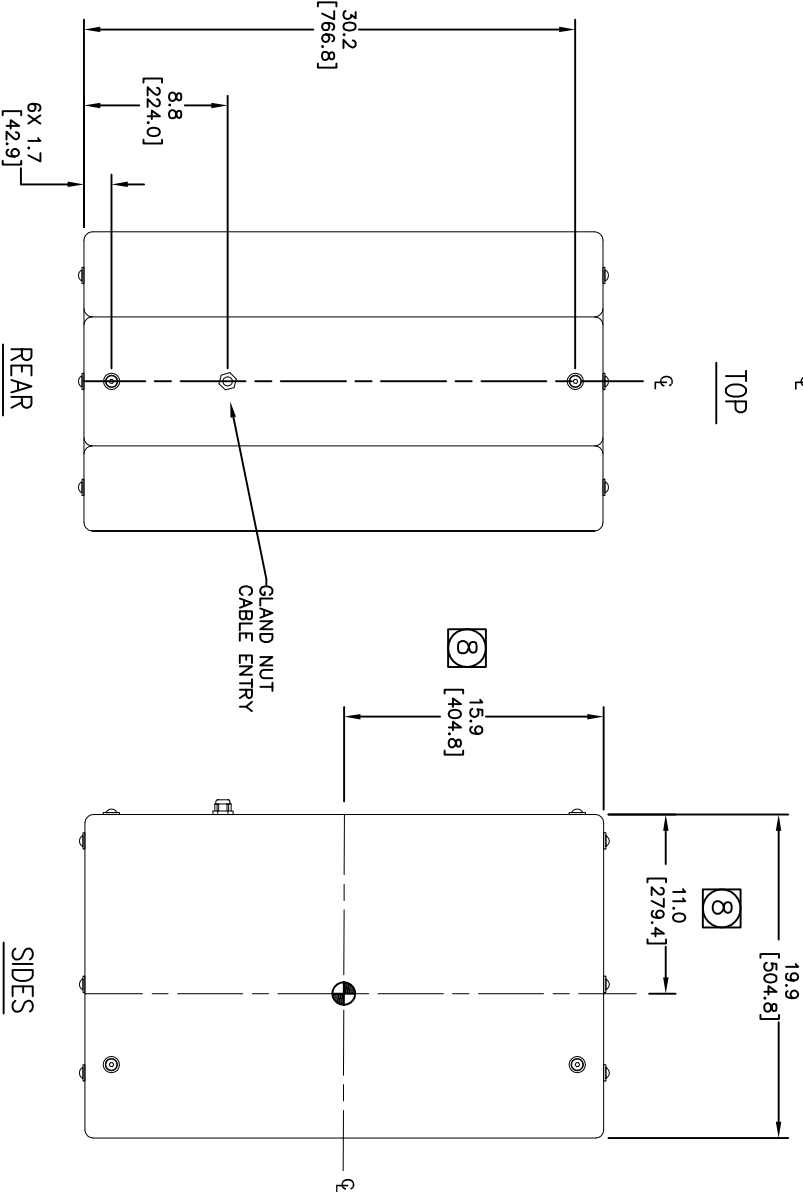

C



REAR

SIDES

FRONT

B


- 8 INDICATED DIMENSIONS ARE TO CENTER OF GRAVITY (CG).
7. WEIGHT: 33.1 KG [73 LBS].
6. SUSPENSION POINTS: M10 THREADED SUSPENSION POINTS. 4X TOP, 4X BOTTOM, 2X LEFT, 2X RIGHT, 2X REAR
5. COMPONENTS: LF – 265H-1
HF – 2408H-1
4. INPUT CONNECTORS: 20' DIRECT BURIAL CAPTIVE CABLE.
3. GRILL: 16 GA. VINYL DIPPED STAINLESS STEEL GRAY WITH BLACK FOAM BACKING AND VAPOR BARRIER.
2. MATERIALS: 5/8 INCH BIRCH PLYWOOD.
1. FINISH: GRAY FIBERGLASS (STD)
(WHITE & BLACK AVAILABLE BY CUSTOM ORDER)

B

A

4. INPUT CONNECTORS: 20' DIRECT BURIAL CAPTIVE CABLE.
3. GRILL: 16 GA. VINYL DIPPED STAINLESS STEEL GRAY WITH BLACK FOAM BACKING AND VAPOR BARRIER.
2. MATERIALS: 5/8 INCH BIRCH PLYWOOD.
1. FINISH: GRAY FIBERGLASS (STD)
(WHITE & BLACK AVAILABLE BY CUSTOM ORDER)

A

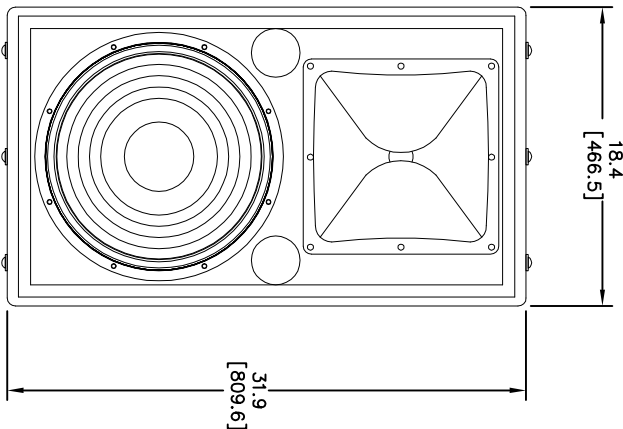

4

3

2

1

TOLERANCES (UNLESS OTHERWISE SPECIFIED)		
X.XX	± .063	INCH
X.X	± .125	INCH
ANGULAR TOLERANCE OF 0±30°		
FRACTIONAL DIMENSIONS ± 1/32		
• ALL DIMENSIONS ARE INCHES		
• DO NOT SCALE DRAWING		
JBL PROFESSIONAL A Harman International Company Northridge, California 91329 U.S.A.		
TITLE AM5215/XX-WRX CUSTOMER DRAWING		
SIZE A	DRAWING NO. 10000330196	REV A
SCALE NTS	SHEET 1	OF 1