

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF JBL INCORPORATED. THEY ARE ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR MANUFACTURE OR APPARATUS WITHOUT WRITTEN PERMISSION.

ALL MATERIAL SPECIFIED ON THIS DRAWING SHALL CONTINUALLY COMPLY WITH THE EFFECTIVE EU RoHS DIRECTIVE, CURRENTLY 2011/65/EU, INCLUDING ALL AMENDMENTS.

REVISIONS				
LTR	DESCRIPTION	DRFT	D,C	DATE
A	INITIAL RELEASE	SS		09/07/24
B	RELEASED FOR MP	SS		20/11/24

D

D

C


C

B



B

A


A

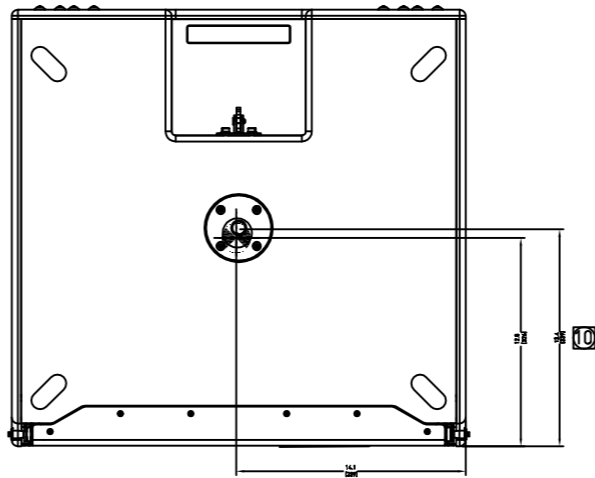


TOP

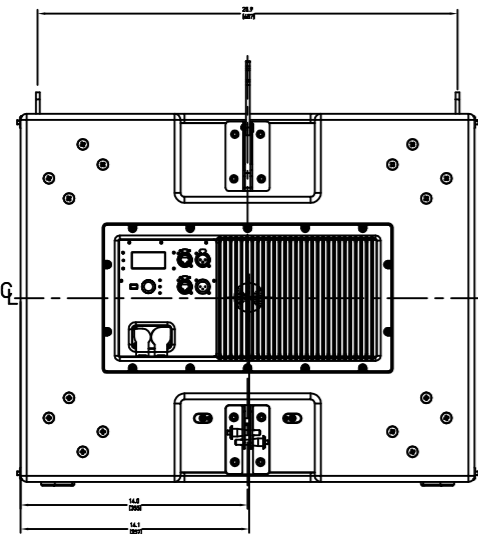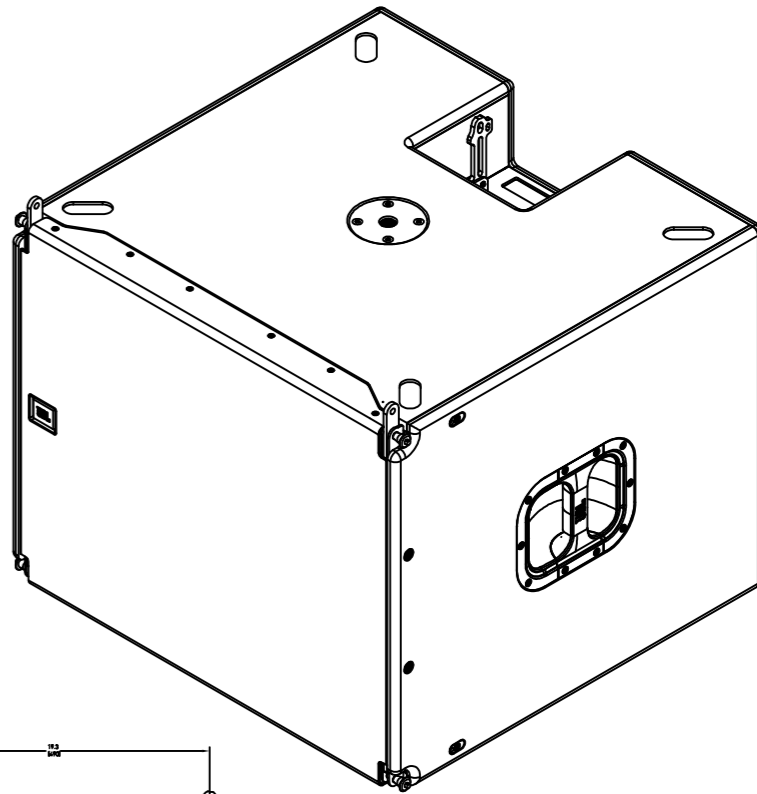


BACK

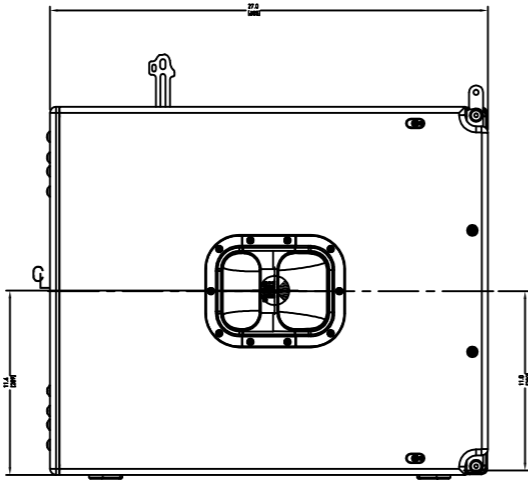


SIDES

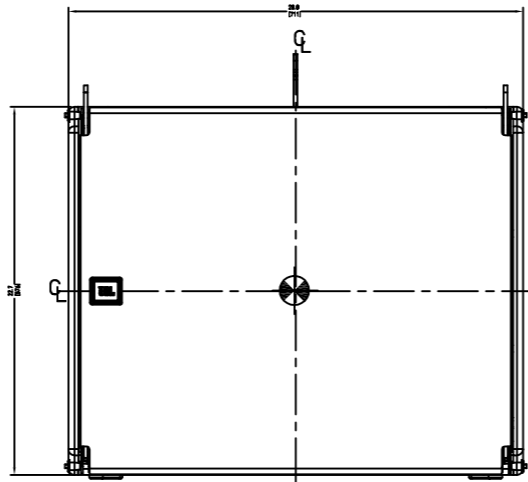

FRONT

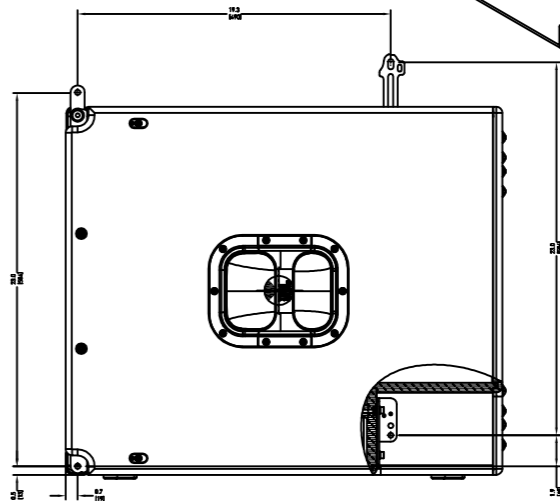

SIDES

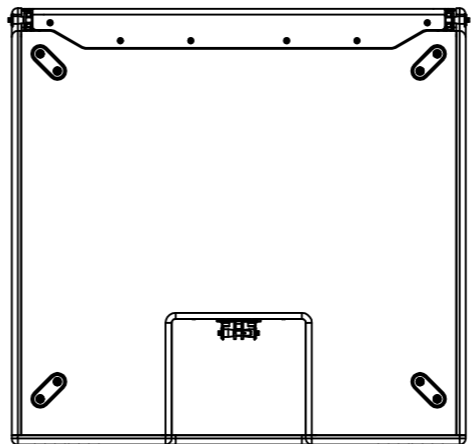

BOTTOM

10. INDICATED DIMENSIONS ARE TO (CG WITH CASTERS)

9. INDICATED DIMENSIONS ARE TO (CG)

8. SYMBOL INDICATES CENTER OF GRAVITY (CG).

7. THREE-POINT, CAPTIVE SUSPENSION, QUICK RELEASE PINS, STEEL WITH ANTI-CORROSION COATING.

6. COMPONENTS: LF - 1X 2279G-1.

5. GRILLE: 14 GA PERFORATED CRS POWDERCOATED BLACK. WITH CLOTH BACKING.

4. AUDIO INPUT CONNECTORS: (1) XLR NEUTRIK.

AUDIO THROUGH OUT CONNECTORS: (1) XLR NEUTRIK.

ETHERNET IN AND THROUGH OUT CONNECTORS: (2) ETHERCON NEUTRIK.

POWER IN AND THROUGH OUT CONNECTORS: (1) POWERCON NEUTRIK.

3. WEIGHT: 54.4 KG (120 LBS).

2. FINISH: BLACK DURAFLEX.

1. MATERIALS: 15MM AND 18MM THICK BIRCH PLYWOOD.

NOTES: (UNLESS OTHERWISE SPECIFIED)

TOLERANCES

(UNLESS OTHERWISE SPECIFIED)

X.XX ± .063 INCH

X.X ± .125 INCH

ANGULAR TOLERANCE OF 0°±30°

FRACTIONAL DIMENSIONS ± 1/32

\* DIMENSIONS ARE INCHES INCHES [MM]

\* ALL DIMENSIONS ARE FINISHED DIMENSIONS

\* DO NOT SCALE DRAWING

**HARMAN**

JBL Professional  
8500 Balboa Blvd  
Northridge, CA 91329  
USA

TITLE  
**CUSTOMER DRAWING: SRX918SF**

SIZE <b>A</b>	DRAWING NO. 1000377286	REV <b>B</b>
------------------	---------------------------	-----------------

SCALE NTS	SHEET 1 OF 1
--------------	-----------------