

KP8052

Passive 12" 2-Way, Full-Range Karaoke Loudspeaker



HIGHLIGHTS ■

Tuned for KTV Applications

JBL signature karaoke tuning provides excellent vocal and bass performance

Precision Crossover

Precision-engineered crossover delivers enhanced vocal clarity

Sleek Design

Sleek, modern design that is well-suited for a wide range of KTV applications and installations

Rotatable, Illuminated JBL Logo

PSL (Passive Sound Lighting) Technology illuminates rotatable JBL Entertainment logo to showcase the quality of the system to customers

Pole Socket

Single-position pole socket for applications that require pole mounting

Continuing JBL Entertainment's iconic heritage in karaoke speakers and audio performance, the JBL KP8052 is a premium 15" passive, high-output, full-range loudspeaker for KTV applications and installations. The speaker follows in the footsteps of its predecessor—the KP6052—as it features excellent vocal and bass performance and JBL's standard of reliability in a reimagined, modern, sleek design.

Featuring JBL's signature KTV tuning, the KP8052 delivers the legendary sound that karaoke-goers and venue owners know and love. In addition to outstanding audio quality, the KP8052 features a fresh, striking form factor that matches the rest of the KP G2 Series. With this uniform look, you can mix and match models from across the portfolio to create a premium KTV system. Plus, the KP8052 includes a rotatable, illuminated JBL Entertainment logo, which allows you to showcase the presence of the renowned JBL brand in your venue. Altogether, with pristine audio and striking aesthetics, the KP8052 enhances KTV venues and provides a memorable karaoke experience.

KEY MESSAGES ■

SIGNATURE JBL KARAOKE SOUND

Following in the footsteps of the original and highly successful KP Series, the KP8052 features JBL's legendary karaoke tuning, which provides excellent vocal and bass performance. With pristine audio quality, karaoke-goers will clearly hear every note while singing their favorite songs.

REIMAGINED, MODERN DESIGN

The KP8052 features a new, sleek form factor that matches the rest of the KP G2 Series. Plus, the loudspeaker features PSL (Passive Sound Lighting) Technology, which illuminates the rotatable JBL Entertainment logo and allows you to showcase the system quality.

UNCOMPROMISING QUALITY

Built with JBL's standard of reliability, the KP8052 endured rigorous testing to ensure it will withstand the test of time. Perfect for a wide range of KTV venues, the KP8052 is designed to deliver optimum performance for the long haul.

FLEXIBLE INSTALLATION

As a member of the KP G2 Series, the KP8052 provides venue owners flexible configuration options as it can be mixed and matched with speakers across the portfolio to build a premium KTV audio system. Plus, the KP8052 features the same dimensions as its predecessor—the KP6052—offering simple retrofitting and installation into existing systems.


KP8052

Passive 12" 2-Way, Full-Range Karaoke Loudspeaker




GRAPHS ■

Frequency Response:

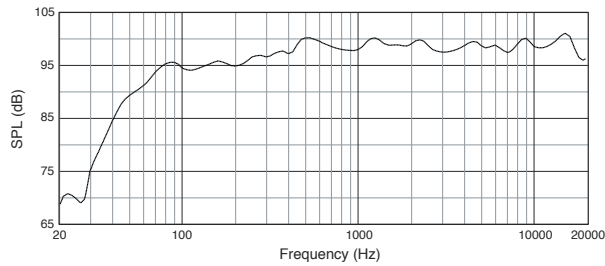

Beamwidth:

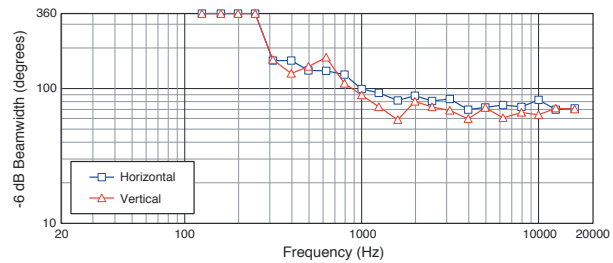


FEATURES ■

- Passive 2-way, bass-reflex full-range karaoke loudspeaker
- 12" Differential Drive® woofer with high power handling and lightweight design
- 1.5" annular polymer diaphragm compression driver
- SonicGuard™ protects high-frequency driver from excess power without sacrificing audio quality
- JBL signature karaoke tuning provides excellent vocal and bass performance
- Precision-engineered crossover delivers enhanced vocal clarity
- Sleek, modern design that is well-suited for a wide range of KTV applications and installations
- PSL (Passive Sound Lighting) Technology illuminates rotatable JBL Entertainment logo
- Single-position pole socket for applications that require pole mounting

DIMENSIONS ■

Dimensions in mm

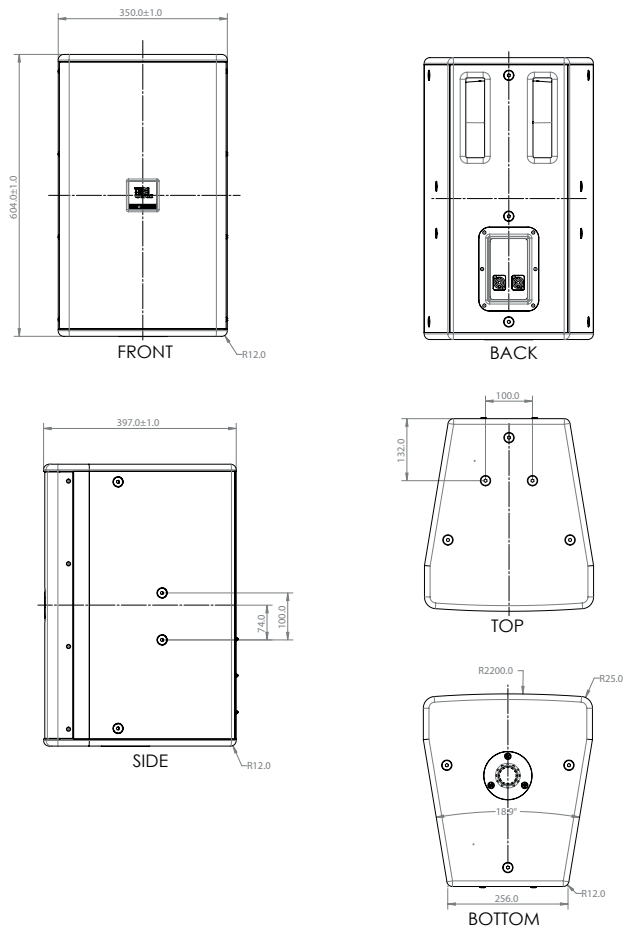

TECHNICAL SPECIFICATIONS ■

| | |
|------------------------------------|---|
| SYSTEM TYPE: | 12", 2-way, bass-reflex |
| FREQUENCY RANGE (-10 dB): | 55 Hz – 20 kHz |
| FREQUENCY RESPONSE (±3 dB): | 80 Hz – 20 kHz |
| SENSITIVITY (1W @ 1M): | 96 dB |
| NOMINAL IMPEDANCE: | 8 ohms |
| MAXIMUM SPL: | 125 dB (131 dB peak) |
| POWER RATING: | Continuous: 500W Program: 1000W Peak: 2000W |
| COVERAGE PATTERN: | 70° x 60° (H x V) |
| LF DRIVER: | 1 x 12" JBL 2262H |
| HF DRIVER: | 1 x 1.5" JBL2408H-1 |
| INPUT CONNECTORS: | 2 x Neutrik® Speakon® NL4MP |
| ENCLOSURE CONSTRUCTION: | Trapezoid, 15 mm, plywood |
| DIMENSIONS (H x W x D): | 604 mm x 350 mm x 397 mm (23.8 in x 13.8 in x 15.6 in) |
| NET WEIGHT: | 17.7 kg (39.0 lb) |



HARMAN Professional 8500 Balboa Blvd. Northridge, CA 91329 USA

© 2019 HARMAN International Industries, Incorporated. All rights reserved.
Features, specifications and appearance are subject to change without notice.

www.jblpro.com

Issued: 11/2019