



## KP6018S


### *18 Inch High-Power Passive Subwoofer*

KP6000 series loudspeaker is especially designed by JBL ENTERTAINMENT® for karaoke sound reproduction. It is manufactured based on JBL legendary loudspeaker development technology.

KP6018S is a compact, high power subwoofer system containing a JBL 18" specially designed woofer in a front-loaded, vented enclosure.

For "Subwoofer / Satellite" configurations, KP6018S is equipped with top-mounted, 35mm pole mount socket. This can be used to mount speakers equipped with standard 35mm pole sockets and weighed up to 50kg (100 lbs).

The enclosure is constructed with 18mm multi-ply high quality birch and finished in a durable black paint coating. The attractive 16 gauge protective screen backed steel grille is applied to provide driver protection with a very professional appearance.

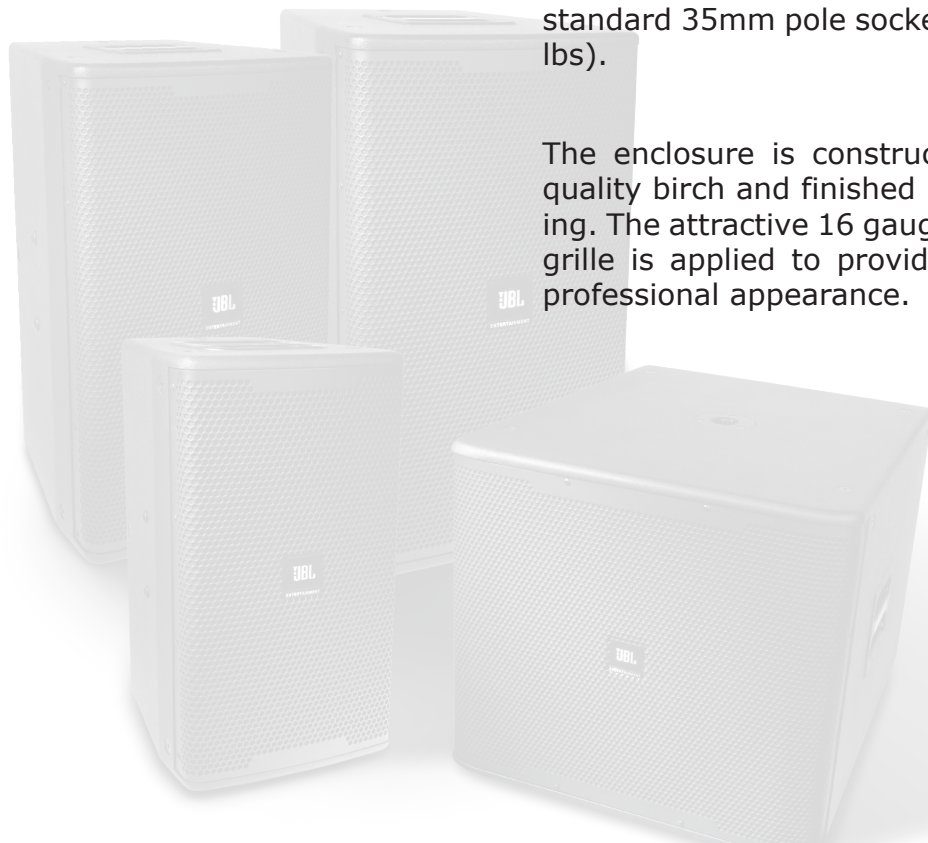



### Features

- 18" driver for extended low-frequency output
- Large vent for reducing distortion
- Low profile and compact Enclosure constructed of 18 mm plywood with rugged durable painting finish
- Heavy duty 16 gauge protective screen backed steel grille
- Top-mounted, 35 mm pole mount socket

### Specification

#### System:

|   |  |
|---|--|
| System Type:                                | 18", bass-reflex                             |
| Frequency Range (-10 dB) <sup>1</sup> :     | 46 Hz - 2.8 KHz                              |
| Frequency Response (±3 dB) <sup>1</sup> :   | 65 Hz - 1.7 KHz                              |
| System Sensitivity (1w @ 1m) <sup>1</sup> : | 95 dB  |
| Nominal Impedance:                          | 8 ohms                                       |
| Maximum SPL:                                | 124 dB (130 dB peak)                         |
| Power Rating <sup>2</sup> :                 | 600 W/1200 W/2400 W(Continuous/Program/Peak) |

#### Physical:

|                         |  |
|-------------------------|--|
| Dimensions (H x W x D): | 540 mm x 600 mm x 700 mm<br>21.3 in. x 23.6 in. x 27.6 in. |
| Net Weight:             | 34.8 Kg (76.8 lbs)   |
| LF Driver:              | 1 x 18" woofer   |
| Input Connectors:       | 2 x Neutrik® SpeakON® NL4MP                                |
| Enclosure Construction: | Rectangular, 18 mm, plywood                                |
| Optional Accessory:     | SS3-BK: Satellite speaker pole                             |

<sup>1</sup> Full space (4n) conditions

<sup>2</sup> IEC standard, full bandwidth pink noise with 6 dB crest factor for specified period

#### Contact Information

On The World Wide Web:  
[www.jblpro.com](http://www.jblpro.com)

Professional Contacts, Outside the USA:  
Contact the JBL Professional Distributor in your area.  
A complete list of JBL Professional international distributors  
is provided at our U.S.A. website: [www.jblpro.com](http://www.jblpro.com)

#### Ordering Information

KP6018S  
Loudspeaker